

# TSM191D IPS Security Container

## Product Data Sheet

### TECHNICAL SPECIFICATIONS

<b>Model</b>	<b>TSM191D</b>
Rec. Heat Load:	175 - 550 Watts
Rack:	9Ux20"D slide-out rack, 85lb capacity
Weight:	725lbs
Dimensions:	19.5"H x 23"W x 39"D*
	add 2.75" to width for vents
	add 4.6" to depth for handle and cable exit
	*(Custom Depths Available)
Door Opening:	16.75"H x 20.25"W
Internal Space:	18.75"H x 22.25"W x 29"D
Power:	115VAC, 50/60Hz, 0.5A (cooling fans)
Noise Levels:	10dBA at 75°F up to 40dBA at 95°F
Cable Count:	Up to 35 (Cat5) incoming "Black"
	Up to 35 (Cat5) outgoing "Red"***
	** (Optional Enlarged Cable Entry Available)

### GSA CLASS 5 FEDERAL SPECIFICATIONS:


**PHYSICAL PROTECTION:** Federal Specification AA-C-2786  
 20 man-hours against surreptitious entry  
 30 man-minutes against covert entry  
 10 man-minutes against forced entry

**LOCK SPECIFICATION:** Federal Specification FF-L-2740  
 Approved Locks: Kaba Mas X-10 and S&G 2740



### FEATURES AT A GLANCE

- GSA approved alternative to CAA or facility build-out
- Highest level class 5 physical protection available
- 9Ux20"D slide-out rack with push-button release for easy removal
- Ultra quiet temperature controlled cooling system
- Two feed-thru style cable entries for Red/Black separation
- Mounting bracket for optional PDS junction box
- 5-outlet power strip with 15ft cord included
- Flat bottom design reduces floor loading

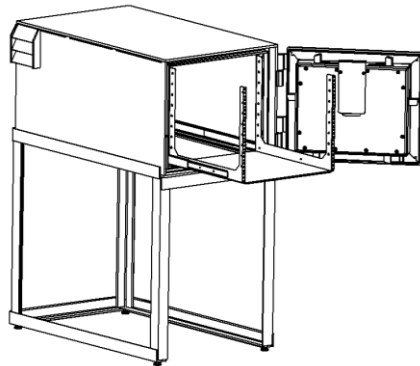

30"H Support Stand



INCOGNITO Executive Secured Comms Center

### OPTIONS & ACCESSORIES

Part No.	Description
TSSPG-BC	SIPRGuard HDMI/USB/Ethernet on-off gateway with two-factor authentication for secure SIPRNet access
TSM30H-191D-SS	30"H Support Stand for 191D model (fits over 2-drawer legal size Class 6 file safe)
TSM1920LT-SLSF	Laptop Slide Tray for 19" Rack, 1U x 20"D, 45lb capacity
TSM192036-FSF	Fixed Shelf for 19" Rack, 1U telescoping design fits 20-36" deep racks, 100 lb capacity
TS-RS1215-RA	1U Rack-Mount Power Strip, 120V, 15A, 12 outlets 5-15R with 15-ft. Cord
TSM666-JB	PDS Junction Box, 6x6x6, Right Side Door Opening
TSM93-ECB	Enlarged Cable Entry Portal for High Cable Counts (up to 72 Cat5)
EX191DFC-CDZ	INCOGNITO Executive Secured Comms Center for Operational Security (custom matching available)
TSMST8PDU-SGD	SafeGuard Remote Monitor, Alarm & Control System: dial rotation, lock status, door position, temp & power, with remote equipment power shutdown

