

TSM191D IPS Security Container

Product Data Sheet

TECHNICAL SPECIFICATIONS

Model	TSM191D
Rec. Heat Load:	175 - 550 Watts
Rack:	9Ux20"D slide-out rack, 85lb capacity
Weight:	725lbs
Dimensions:	19.5"H x 23"W x 39"D* add 2.75" to width for vents add 4.6" to depth for handle and cable exit *(Custom Depths Available)
Door Opening:	16.75"H x 20.25"W
Internal Space:	18.75"H x 22.25"W x 29"D
Power:	115VAC, 50/60Hz, 0.5A (cooling fans)
Noise Levels:	10dBA at 75°F up to 40dBA at 95°F
Cable Count:	Up to 35 (Cat5) incoming "Black" Up to 35 (Cat5) outgoing "Red"*** **(Optional Enlarged Cable Entry Available)

GSA CLASS 5 FEDERAL SPECIFICATIONS:

PHYSICAL PROTECTION: Federal Specification AA-C-2786
 20 man-hours against surreptitious entry
 30 man-minutes against covert entry
 10 man-minutes against forced entry


LOCK SPECIFICATION: Federal Specification FF-L-2740
 Approved Locks: Kaba Mas X-10 and S&G 2740



FEATURES AT A GLANCE

- GSA approved alternative to CAA or facility build-out
- Highest level class 5 physical protection available
- 9Ux20"D slide-out rack with push-button release for easy removal
- Ultra quiet temperature controlled cooling system
- Two feed-thru style cable entries for Red/Black separation
- Mounting bracket for optional PDS junction box
- 5-outlet power strip with 15ft cord included
- Flat bottom design reduces floor loading

30"H Support Stand

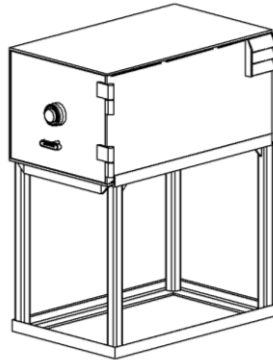

OPTIONS & ACCESSORIES

Part No.	Description
TSM30H-191D-SS	30"H Support Stand for 191D model
TSM1922-FSF	Fixed Shelf for 19" Rack, 1U x 22"D
TSM666-JB	PDS Junction Box, 6x6x6, Right Side Door Opening
TSM93-ECB	Enlarged Cable Box for High Cable Counts (up to 72 Cat5)
TSM230V-PTK	European Power Converter with Shuko Plug (for cooling fans only)
EX191DFC-CDZ	INCOGNITO Executive Secure Comms Workstation for Operational Security
TSM1K1VME-UG-PC	UserGuard HDMI/USB/Ethernet on-off gateway with PIN+CAC authentication, for secure SIPRNet access
TSMST8SGD-IPS2	SafeGuard Remote Monitor, Alarm & Control System: dial rotation, lock status, door position, temp & power, with remote equipment power shutdown



INCOGNITO Executive Secure Comms Workstation

